

AK2+ ferrite 90° red. squib connector

Ø11mm VDA-AK2+ ESD (ground), 90° angled, reduced insertion force

Amphenol product serie:
CA 288C XXXX 7XXX

mating design:

- serviceable locking legs
- pre-positioned CPA
- one step mating possible
- 'scoop-proof', 'kajiri-safe' nozzle with ESD (ground) contact

terminal system:


- O-type contact system
- one piece terminal design
- selective gold plated
- ESD (ground) contact tin plated

termination technology:

- wire termination welded

general:

- pig tail supplied with different cable lengths
- single wire
- twisted wire
- jacketed cable

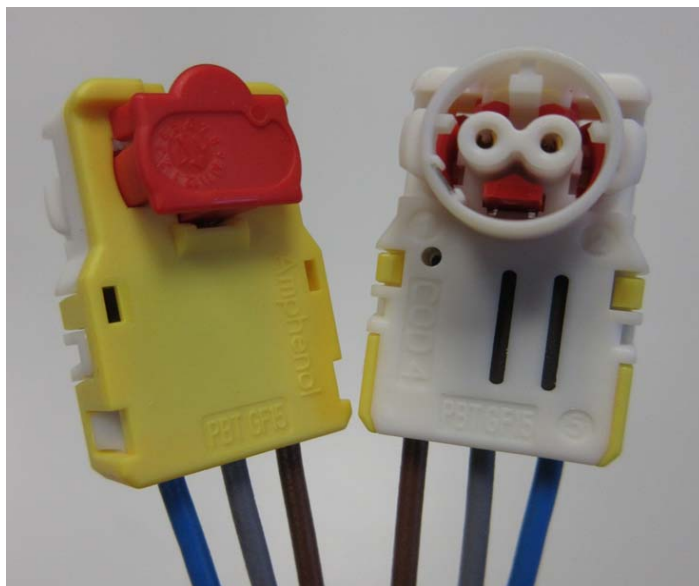

design details:

- housing material: PBT
- contact material: CuSn
- standard wire gauge: 0,35mm²/0,5mm²
- RFI/EMI protection: ferrite core

dimensions:

performance characteristics:

- pull out force : >135N
- insertion force: < 50N
- temperature range: -40°C to +90°C
- dielectric resistance: 1000V / DC

connector interface:

- Ø11mm VDA-AK2 ESD
- coding: 4 (white), 5 (brown)

